


# **WEIGH-TRONIX**

## **WP-250 Ticket Printer**

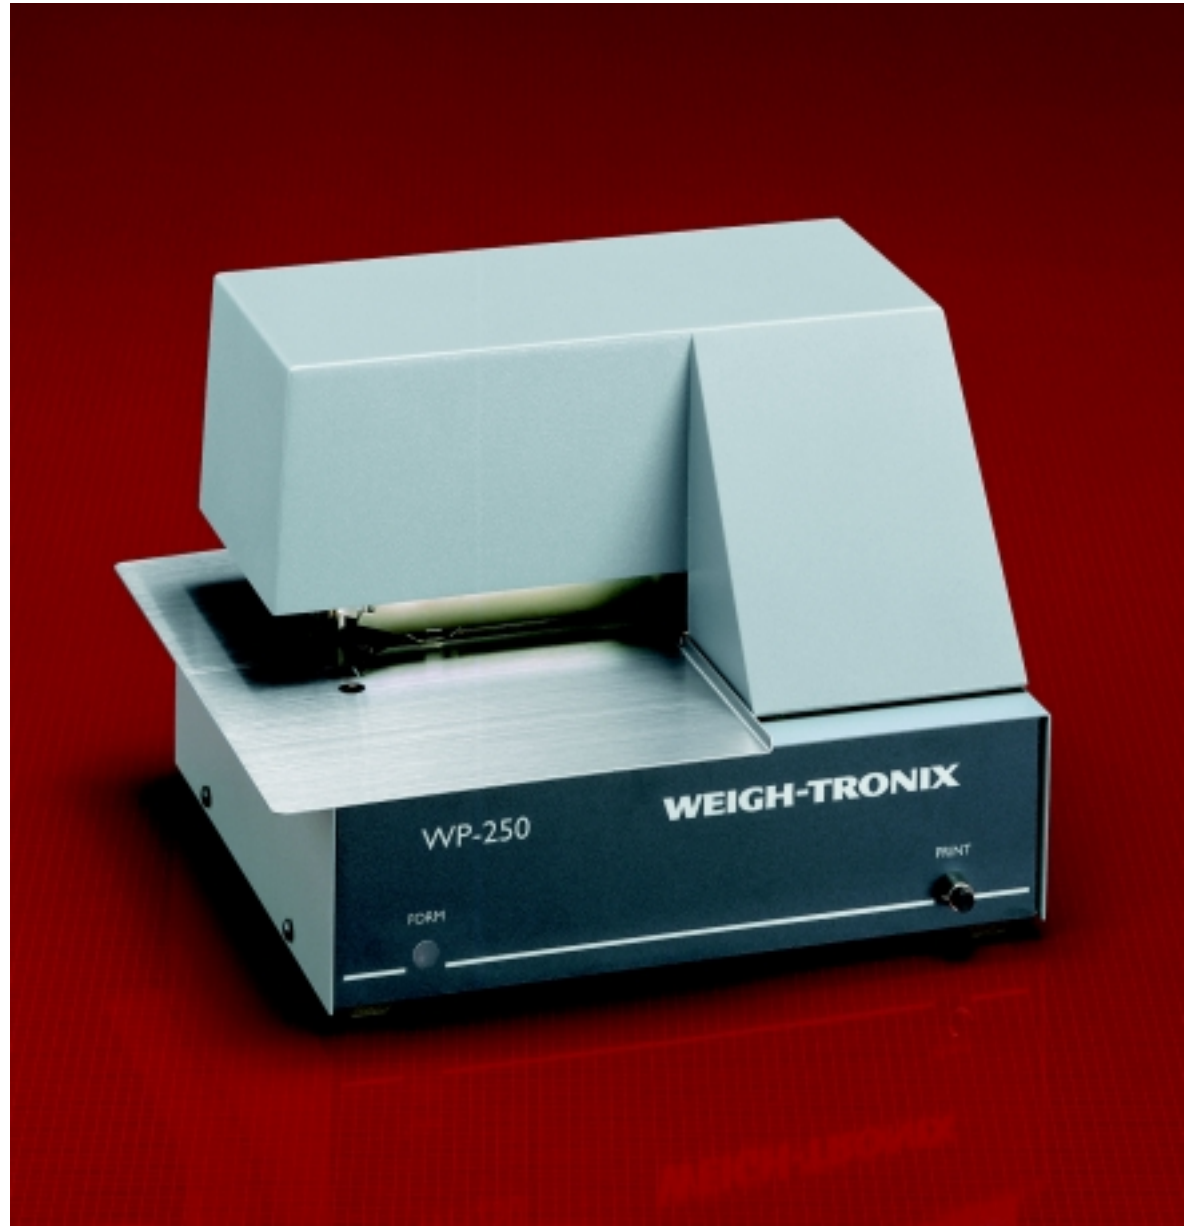

# WP-250 Ticket Printer

The WP-250 is a versatile document and forms printer with 40-column capacity. It features an open-throat design which allows printing on large forms and tickets. The WP-250 easily handles either single or multiple-copy forms and prints up to five-part forms effectively.

The WP-250 is both fast and versatile. A 4K buffer permits immediate transfer of information to the printer and frees up the scale and computer equipment for

other uses. The print speed and the line feed rates are 3 lines per second.

The versatility of the WP-250 is demonstrated by the following standard features: RS-232 and 20 mA current loop, print button, paper sensor, programmable top and left margins, programmable multi-strike printing, bidirectional printing, inverted printing, normal and double-width printing.

## Specifications

---

### Printing

- Type:** Bidirectional dot-matrix
- Print speed:** 3.0 lines per second
- Characters per line:** 40 characters @ 12 c.p.i.
- Printing width:** 3.33 inches
- Standard matrix:** 5 x 7
- Characters:** 95 printable characters
- Line spacing:** 6 lines per inch
- Line feed rate:** 3.0 lines per inch
- Multi-strike printing:** 2 to 10 times
- Print button:** Printer transmits the ENQ character
- Print head life:** 100,000,000 characters

### Interfacing

- Type:** RS-232 or 20 mA current loop
- Baud rates:** 300, 600, 1200, 2400, 4800, 9600
- Input buffer:** 4000 characters
- Ribbon:** Dual-bobbin typewriter ribbon, purple

### Electrical

- Input voltage:** 115 / 230 VAC +10, -15%
- Single phase:** 50 / 60 Hz, 90 watts operating
- Fuse size:** 3AG 1.5 amp
- Grounding:** Unit must be connected to a grounded receptacle

### Environmental

- Temperature:** 32° to 115° F (0° to 46° C)
- Humidity:** 10% to 90% non-condensing
- Ventilation:** Free air movement
- Dust:** Non-conducting, non-corrosive
- Electromagnetic radiation:** Moderate RF fields can be tolerated

### Dimensions:

8.25" H x 12" W x 9" D (21.0 cm x 30.5 cm x 22.9 cm)

**Weight:** 18 lb (8.16 kg)

**Cabinet:** Heavy-duty 16-gauge steel case

### Options:

- Time and date
- Parallel BCD interface

**Warranty:** 120 day

Normal width printing

```
09:04 AM 06-11-92
G 1000 lb
```

Double width printing

```
09:03 AM 06-11-92
G 1000 lb
```

### Weigh-Tronix

1000 Armstrong Dr.  
Fairmont, MN 56031 USA  
Telephone: 507-238-4461  
Facsimile: 507-238-4195  
e-mail: industrial@weigh-tronix.com  
www.weigh-tronix.com

### Weigh-Tronix Canada, ULC

217 Brunswick Blvd.  
Pointe Claire, QC H9R 4R7 Canada  
Telephone: 514-695-0380  
Facsimile: 514-695-6820



# WEIGH-TRONIX

Weighing Products & Systems